



1	2	3	4	5	6	7
---	---	---	---	---	---	---

RoHS Compliant


USB AM TYPE MALE
P1

1800±30mm

P2

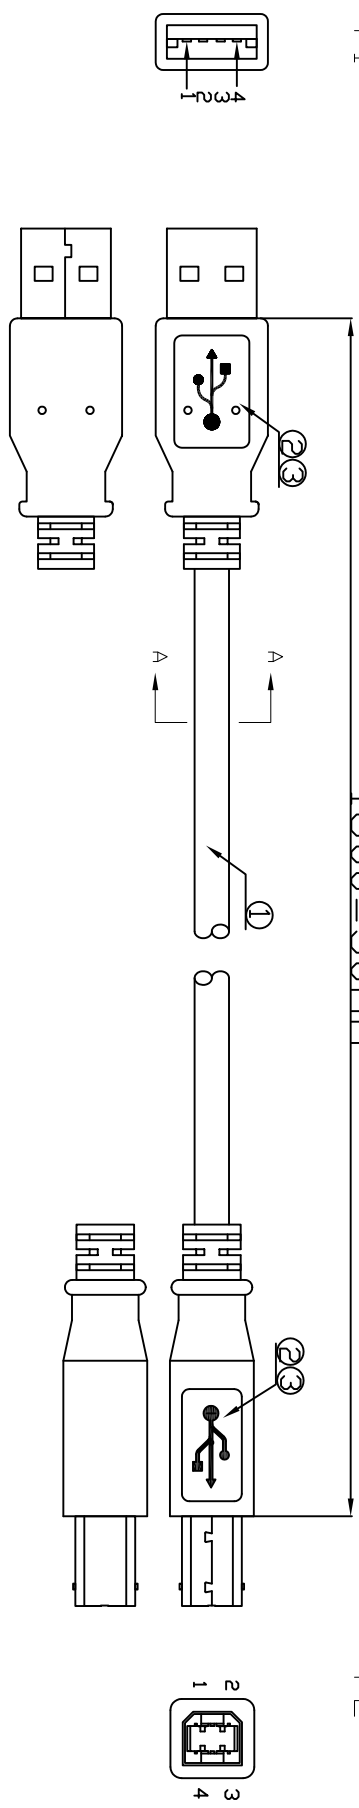

NOTES:
 1: CABLE: UL 2725 28AWG*1P+28AWG*2C+AL/MY+B DD=3.8±0.2mm JACKET COLOR: BEIGE
 CABLE MUST PRINT: E***9***** AWM STYLE 2725 80°C 30V VW-1
 2: CONNECTOR:
 P1: USB A/M, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
 P2 :USB B/M, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
 3: HODD: MOLDED TYPE, PVC 45P, COLOR: BEIGE
 4: ELECTRICLE TEST:
 (1) 100% OPEN SHORT & MIS WIRE TEST.
 (2) CONTACT RESISTANCE 3 ohm Max .
 (3) INSULATION RESISTANCE 10M ohm Min .
 (4) HI-PDT TEST: DC 300V/10ms



ASSMANN WSW P/N	LENGTH
AK-300105-010-E	1.0 M
AK-300105-018-E	1.8 M
AK-300105-030-E	3.0 M

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		06.07.2009	Rale	ASSMANN WSW-No.
X.	±X	06.07.2009	Meng	AK-300105-xxx-E
X.X	±X			
X.XX	±X			
DIM	TOL	25.02.2015	A. Plate	Drawing-No.
X.°	±X°			ASS 3635 CA
X.X°	±X°	06.07.2009	Rale	rev02
Angle	TOL			Sheet

RoHS compliant

1	2	3	4	5	6	7
---	---	---	---	---	---	---



ASS 3635 CA rev02