




1	2	3	4	5	6	7
---	---	---	---	---	---	---

**A** USB AM TYPE MALE  
P1

**A** USB BM TYPE MALE  
P2

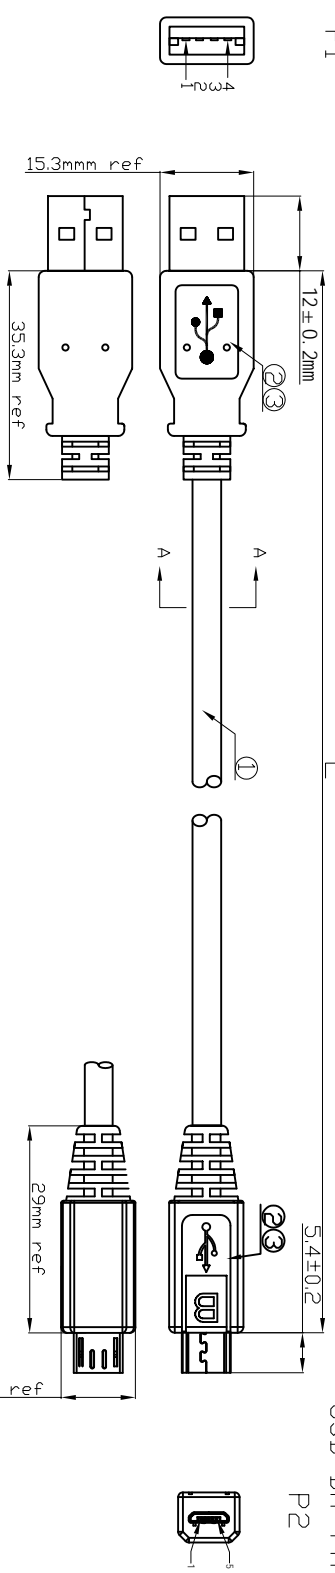

**C** NOTES:  
 1CABLE: UL 2725 28AWG/7/0.12BC)\*IP+28AWG/7/0.12BC)\*2C+AL/MY+D28AWG/7/0.12CCS)  
 +B62Y; COVERAGE ALM) DD=3.8±0.20mm JACKET COLOR: BLACK  
 CABLE MUST PRINT: E\*\*\*\*\* W AWM STYLE 2725 80°C 30V VV-1  
 2.CONNECTOR:  
 P1 : USB A/M, SOLDER, WHITE INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL  
 P2 : MICRO USB SP B/M, SOLDER, BLACK INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL  
 3.HOOD: MOLDED TYPE,PVC 4SP,COLOR:BLACK  
 4.ELECTRICLE TEST:  
 (1)100% OPEN SHORT & MIS WIRE TEST.  
 (2)CONTACT RESISTANCE 3 ohm Max .  
 (3)INSULATION RESISTANCE 10M ohm Min .  
 (4)HI-POT TEST:DC 300V/10ms

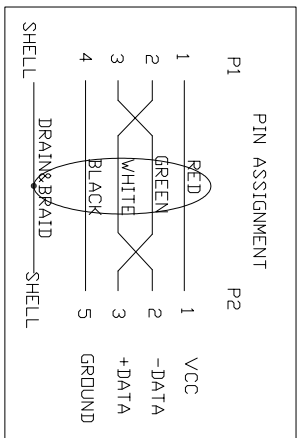

ASSMANN WSW P/N	LENGTH(L)
AK-300110-018-S	1800±30mm
AK-300110-030-S	3000±50mm

<b>G</b>	Scale	FREE					Customer-No.	
	TOLERANCE							
<b>H</b>	X.X	±X					ASSMANN WSW-No.	
	X.X.X	±X					AK-300110-xxx-S	
<b>H</b>	DIM	TOL	①	②			Drawing-No.	
	X.°	±X°	①	②			ASS 3645 CA	rev02
<b>H</b>	X.X°	±X°	①	②			Replace	Sheet
	Angle	TOL	Id.	Modification	Date	Name		

**ROHS compliant**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

