


# FUSE BLOCK

Electric Parts

## R3-76-07-3 1 LED Warning Light / Blade Fuse

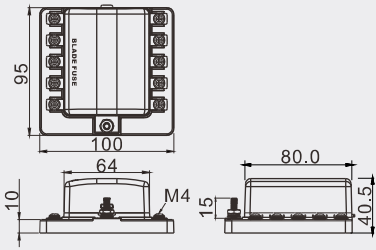

INDICATOR LIGHT
With LED
W/O LED

POSITIONS	CUT-OUT
0 4 	
0 6 	
1 0 	

0 7  
SC 4 ( M4 Screws)


Input: 100 A max  
Output: 30A max per circuit

FUSE BLADE FUSE

**FEATURES:**

- Material:  
Base: PBT (UL flame: 94V-0).  
Cap: PC (UL flame: 94V-2).  
Terminal: tin plated brass.
- Input terminal rating: #10-32 threaded studs (100A. max.)
- Output terminal rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Clear insulating cover design for water splash and dust proof.
- Easy to open by pressing the latch.

## R3-76C-01-3 1 LED Warning Light / Single Side Design / Blade Fuse

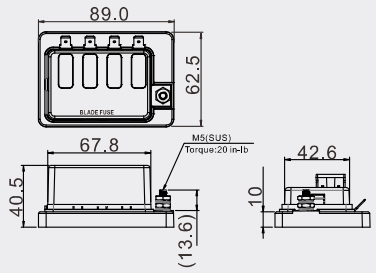

INDICATOR LIGHT
With LED
W/O LED

POSITIONS	CUT-OUT
0 4 	
0 6 	
1 0 	

(6.4mm)0.250"  
Quick connect

Input: 100 A max  
Output: 30A max per circuit

FUSE BLADE FUSE

**FEATURES:**

- Material:  
Base: PBT (UL flame: 94V-0).  
Cap: PC (UL flame: 94V-2).  
Terminal: tin plated brass.
- Input terminal rating: #10-32 threaded studs (100A. max.)
- Output terminal rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Single side design for easy wire entry.
- Clear insulating cover design for water splash and dust proof.
- Easy to open by pressing the latch.



All the specifications are subject to change without notice.