


REV	MODIFICATION	DATE
A/0	X	2015-10-26

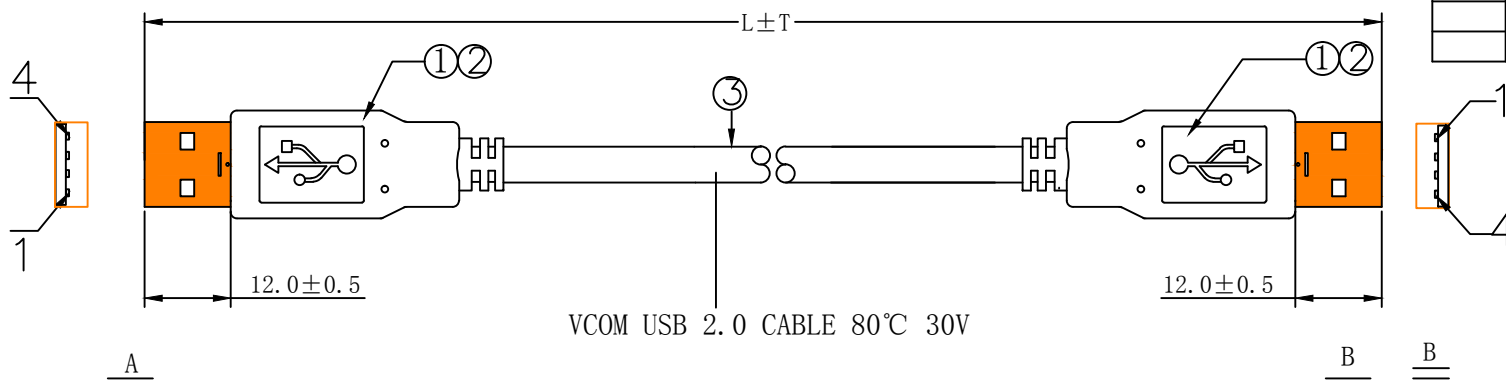


VCOM USB 2.0 CABLE 80°C 30V

WIRING TABLE:

<u>A</u>		<u>B</u>
1	---Red---	1
2	---White---	2
3	---Green---	3
4	---Black---	4
G	---DW+BD---	G

Twist pair

NO.	L	T
1	1500MM	20MM
2	1800MM	20MM
3	3000MM	30MM
4	4500MM	50MM
5	5000MM	50MM

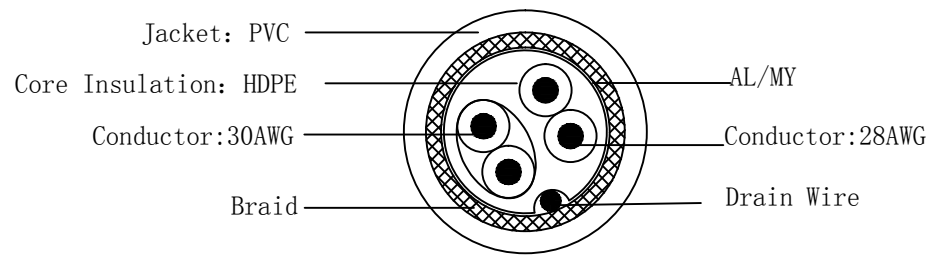

Test Conditions:
 1. 100% open & short circuit test;
 2. Insulation Resistance: 2.0Mohm (MIN);
 3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .



③	CABLE: [30#*1P+28#*2C+AL/MY+DW+BD], OD:4.5mm, PVC JACKET, BLACK	M	1.5-5
②	OVER MOLDING:PVC-50P BLACK PVC	g	13.5
①	USB A MALE SOLDERING TYPE, GOLD-PLATED PBT WHITE COLOR	SET	1
NO.	MATERIAL DESCRIPTION	UNIT	QTY

ITEM	USBAM/AM 2.0V	CUSTOMER	ETE	UNIT	mm	PAGE:1of1
PART NO.		CUSTOMER NO.				
PRODUCT NO.		REV:	A/0	DATE	2015-06-30	
DRAWN BY:XIE		CHECKED BY:		APPROVED BY:		