

## Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

### Travel Distance Variety

Travel (mm)	15	20	30	45	60
-------------	----	----	----	----	----

### Total Resistance Variety

Total resistance (kΩ)	10	20	50	100	200
-----------------------	----	----	----	-----	-----

### Resistance Taper

Resistance taper	1B	4B	10A	15A
------------------	----	----	-----	-----

### Note

DC (10VDC) is also available. (Tapped types are not available)

### Lever Types

Unit:mm

Metal lever		Insulated lever							
Code	Dimensions	Code	Dimensions						
9-2	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>5</td></tr> </table>	L <sub>1</sub>	5	J-1	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>5</td></tr> </table>	L <sub>1</sub>	5		
L <sub>1</sub>									
5									
L <sub>1</sub>									
5									
9-1	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>10</td></tr> </table>	L <sub>1</sub>	10	A	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>10</td></tr> <tr><td>15</td></tr> </table>	L <sub>1</sub>	10	15	
L <sub>1</sub>									
10									
L <sub>1</sub>									
10									
15									
6	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>15</td></tr> <tr><td>20</td></tr> </table>	L <sub>1</sub>	15	20	C	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>10</td></tr> <tr><td>15</td></tr> </table>	L <sub>1</sub>	10	15
L <sub>1</sub>									
15									
20									
L <sub>1</sub>									
10									
15									
4	<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>15</td></tr> <tr><td>20</td></tr> </table>	L <sub>1</sub>	15	20					
L <sub>1</sub>									
15									
20									

### Corresponding Specifications

Unit:mm

Resistance taper	3B, 15C
Dust cover	Available
Tap	Available (Only the center-positioned)

Insulated lever configuration				
B				
<table border="1"> <tr><td>L<sub>1</sub></td></tr> <tr><td>10</td></tr> <tr><td>15</td></tr> </table>	L <sub>1</sub>	10	15	
L <sub>1</sub>				
10				
15				

### Terminal Layout/Circuit Diagram (Viewed from Mounting Side)

<p><b>Single-unit</b></p>	<p><b>Single-unit (with lug terminal) (RS6011Y only)</b></p>	<p><b>Dual-unit</b></p>
---------------------------	--	-------------------------

### Note

marked are specifications recommended by ALPS.

Refer to P.433, 470 for resistance taper.

Rotary Potentiometers

Slide Potentiometers

General-use

Mixer



Automotive Use

## Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

### Sample Part Number



Specify the travel distance from the below codes.

Travel (mm)	Code	Travel (mm)	Code
15	15	45	45
20	20	60	60
30	30		

Number of resistor elements

<b>Single</b>	1(Enter "Y" for 60 mm travel)
<b>Dual</b>	2

Lever type/Length of operation unit (mm)

**Insulated lever**

Code	Configuration	Length
J1	J-1	5
0A	A	10
		15
0C	C	10
		15
0B	B	10
		15

**Metal lever**

Code	Configuration	Length
91	9-1	10
92	9-2	5
04	4	15
		20
06	6	15
		20

Length of operation unit

If the length is less than 10 mm, add a "0" before the number.  
(e.x., 5 mm length="05")

Detent

Code	Detent
<b>C0</b>	Without
<b>C1</b>	Center

Mounting plate

Code	Mounting plate
<b>P0</b>	Without
<b>P1</b>	With



Total resistance

Code	Total resistance (kΩ)	Code	Total resistance (kΩ)
<b>103</b>	10	<b>104</b>	100
<b>203</b>	20	<b>204</b>	200
<b>503</b>	50		

Resistance taper

Code	Resistance taper
<b>A</b>	15A
<b>B</b>	1B
<b>D</b>	10A
<b>W</b>	4B
<b>V</b>	3B
<b>C</b>	15C

B:For tone & general  
V:For vol.

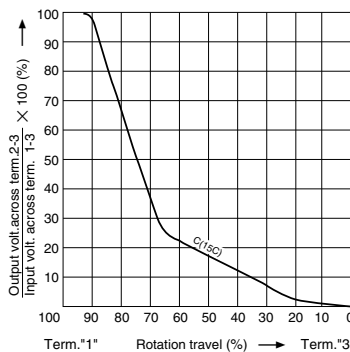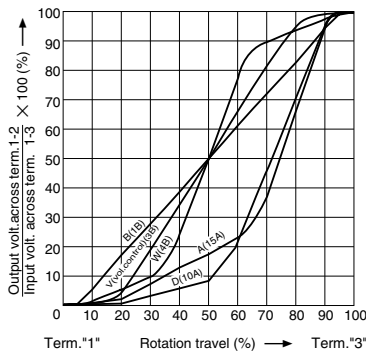

### Note

marked are specifications recommended by ALPS.

Rotary Potentiometers  
Slide Potentiometers

General-use  
Mixer

Automotive Use