
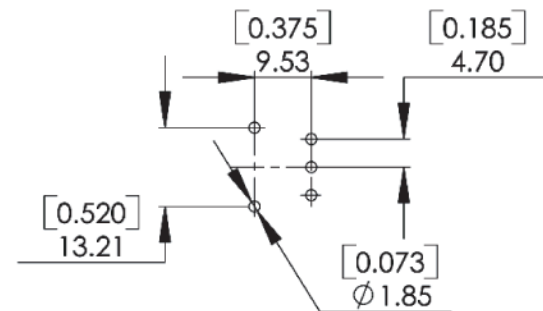


SPECIFICATIONS:

CONTACT RATING : 6 AMPS @ 120 V AC or 28 V DC.
 3AMPS @250 V AC or 0.4 AMPS @ 20V AC or DC
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : Nylon.
 BUSHING : Brass, nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.



P.C. MOUNTING

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .X .XX		ANGLE ½	⊕	UNIT	mm	PART NAME	DWG NO
△			DRAWN BY	Alice	DESIGNED BY	Eric	SCALE		PART NO	WS0234A
△			CHECKED BY		APPROVED BY		DATE	2006.01.25	SL19 SPEC DRAWING	
△	2006.01.25 換新圖框, 重新出圖	吳美玉							SL19-123	