

U.I. Lapp GmbH	<h1>DATASHEET</h1>	
	<b>EPIC® KIT H-BE 24 BS AG</b>	75009652 07.11.2014


Standard inserts with screw termination, crimp termination, cage clamp termination and Push-In termination  
Standard inserts with screw, crimp cage clamp and Push-In termination  
The EPIC® H-BE series is suitable for applications that require a reliable connection when working with high voltages and currents



Robust



Temperature-resistant

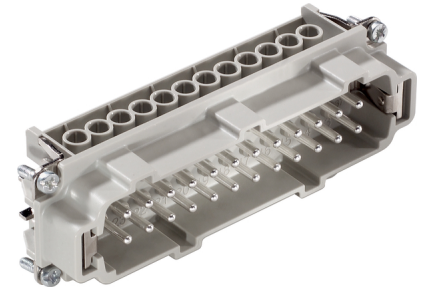

### Info

Multifunctional insert for versatile applications  
Screw, crimp, cage clamp and Push-In version - freely combinable  
Also as EPIC® H-BE 48 available

### Application range

Mechanical engineering  
Light & sound technology  
Plastics industry

### Remark




Photographs are not to scale and do not represent detailed images of the respective products.

### Technical Data

Article number:	75009652
Pieces / PU:	1
Rated voltage (V):	IEC: 500 V UL: 600 V CSA: 600 V
Rated impulse voltage:	6 kV
Rated current (A):	IEC: 16 A UL: 16 A CSA: 16 A
Contact resistance:	< 2 mOhm
Contacts:	Copper alloy, hard silver-plated
Number of contacts:	24 + PE
Termination methods:	Screw termination: 0.5 - 2.5 mm <sup>2</sup>
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	Certified production control: VDE-REG. no.: B437
	UL-tested: UL File Number: E75770
Degree of soiling:	3

Product Management	Document: EPIC® KIT H-BE 24 BS AG	1 / 4
--------------------	-----------------------------------	-------


U.I. Lapp GmbH	<h1>DATASHEET</h1>	
	<b>EPIC® KIT H-BE 24 BS AG</b>	75009652 07.11.2014

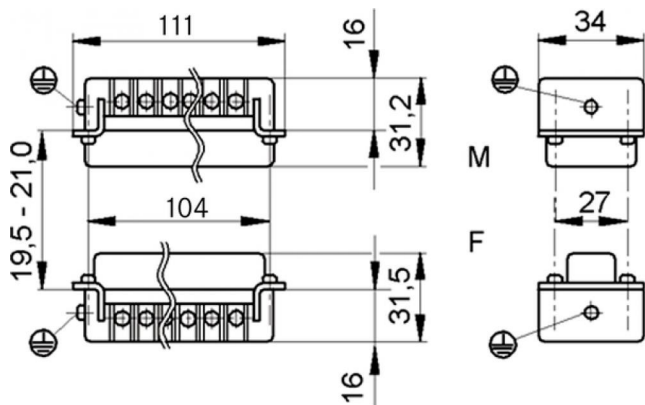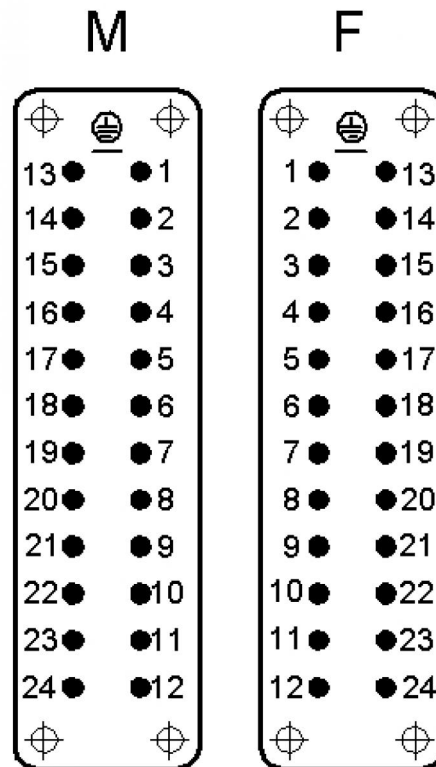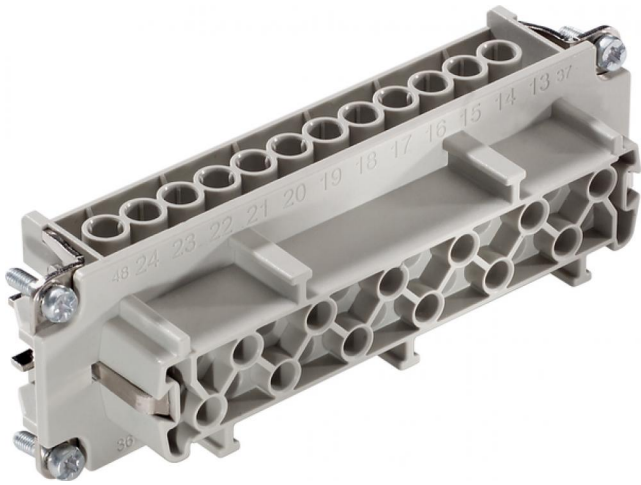

Product Management	Document: EPIC® KIT H-BE 24 BS AG	2 / 4
--------------------	-----------------------------------	-------

U.I. Lapp GmbH	<h1>DATASHEET</h1>	
	<b>EPIC® KIT H-BE 24 BS AG</b>	75009652 07.11.2014

Housing design H-B. The industry standard.  
Ideal for many applications due to a wide range of housings and inserts

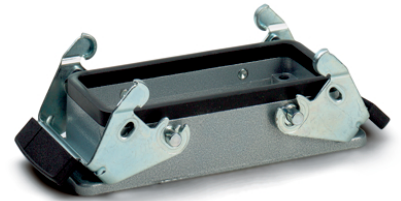

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Universal, robust metal housings size H-B 24

### Application range

Plant engineering  
Light & sound technology  
Plastics industry

### Product features

Panel-mount base  
Dual levers  
Included: flat gasket

### Remark


Photographs are not to scale and do not represent detailed images of the respective products.

### Technical Data

Article number:	75009652
Pieces / PU:	1
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C

Product Management	Document: EPIC® KIT H-BE 24 BS AG	3 / 4
--------------------	-----------------------------------	-------

U.I. Lapp GmbH	<h1>DATASHEET</h1>	
	<b>EPIC® KIT H-BE 24 BS AG</b>	75009652 07.11.2014

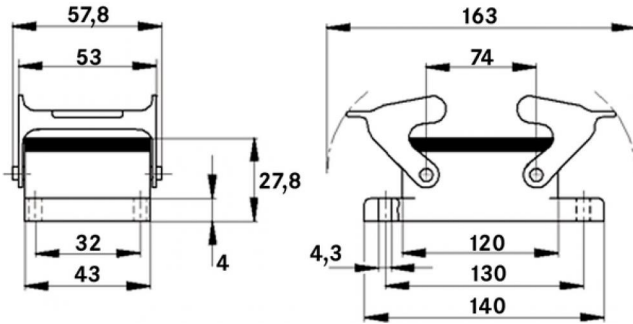

Product Management	Document: EPIC® KIT H-BE 24 BS AG	4 / 4
--------------------	-----------------------------------	-------