

CONTACTOR, AC-3, 4KW/400V, 1NO, DC 24V,  
3-POLE, SZ S00 SCREW TERMINAL

General technical data:		
<b>Product brand name</b>		SIRIUS
<b>Product designation</b>		3RT2 contactor
<b>Size of the contactor</b>		S00
<b>Protection class IP / frontal/front side</b>		IP20
<b>Degree of pollution</b>		3
<b>Altitude of installation site / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature</b>		
• during storage	°C	-55 ... 80
• during the operating phase	°C	-25 ... 60
• during transport	°C	-55 ... 80
<b>Resistance against shock</b>		9.8g / 5 ms and 5.9g / 10 ms
<b>Impulse voltage resistance / rated value</b>	kV	6
<b>Insulation voltage / rated value</b>	V	690
<b>Resistive loss</b>		
• per conductor / typical	W	0.7
• of the magnet coil / at DC / typical	W	4
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		Q
<b>Mechanical operating cycles as operating time</b>		
• of the contactor / typical		30,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		10,000,000

Main circuit:		
<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at 3 AC / rated value</b>		
• maximum	V	690

<b>Operating current / at AC-1 / at 400 V</b>		
• at 40 °C ambient temperature / rated value	A	22
• at 60 °C ambient temperature / rated value	A	20
<b>Operating current</b>		
• at AC-2 / at 400 V / rated value	A	9
• at AC-3 / at 400 V / rated value	A	9
• at AC-4 / at 400 V / rated value	A	8.5
• with 1 current path / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	2.1
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	12
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.1
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.35
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
<b>Service power</b>		
• at AC-2 / at 400 V / rated value	kW	4
• at AC-3		
• at 400 V / rated value	kW	4
• at 500 V / rated value	kW	4.5
• at 690 V / rated value	kW	5.5
• at AC-4 / at 400 V / rated value	kW	4
<b>Operating reactive power / at AC-6b</b>		
• at 230 V / rated value	var	0
• at 400 V / rated value	var	0
• at 690 V / rated value	var	0
<b>Off-load operating frequency</b>	1/h	10,000
<b>Switching frequency</b>		
• at AC-1 / according to IEC 60947-6-2 / maximum	1/h	1,000
• at AC-2 / according to IEC 60947-6-2 / maximum	1/h	750



**Short-circuit:****Design of the fuse link**

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
  - at type of coordination 1 / required
  - at type of coordination 2 / required

fuse gL/gG: 10 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20A

**Installation/mounting/dimensions:****built in orientation**

vertical

**Type of fixing/fixation**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

**Type of fixing/fixation / Series installation**

Yes

**Width**

mm

45

**Height**

mm

57.5

**Depth**

mm

72

**distance, to be maintained, to the ranks assembly**

- forwards
- backwards
- upwards
- downwards
- sideways

mm

0

mm

0

mm

6

mm

6

mm

0

**distance, to be maintained, to earthed part**

- forwards
- backwards
- upwards
- downwards
- sideways

mm

6

mm

0

mm

6

mm

6

mm

6

**distance, to be maintained, conductive elements**

- forwards
- backwards
- upwards
- downwards
- sideways

mm

6

mm

6

mm

6

mm

10

mm

6

**Connections:****design of the electrical connection**

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

**Type of the connectable conductor cross-section**

- for main contacts
  - unifilar
  - stranded wire
  - stranded wire
    - with conductor end processing
- at AWG-conductors / for main contacts
- for auxiliary contact
  - solid
  - stranded wire
    - with wire end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (20 ... 16), 2x (18 ... 14), 2x 12
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (20 ... 16), 2x (18 ... 14), 2x 12

### Certificates/approvals:

verification of suitability

CE / UL / CSA / CCC

### Safety:

**B10 value / with high demand rate**

- according to SN 31920

1,000,000

**T1 value / for proof test interval or service life**

- according to IEC 61508

a

20

**Proportion of dangerous failures**

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

75

%

75

**Failure rate (FIT value) / with low demand rate**

- according to SN 31920

FIT

50

**Protection against electrical shock**

finger-safe

### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Global Industry Mall (Online ordering system)**





<http://www.siemens.com/industrial-controls/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RT2016-1BB41/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT2016-1BB41](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2016-1BB41)

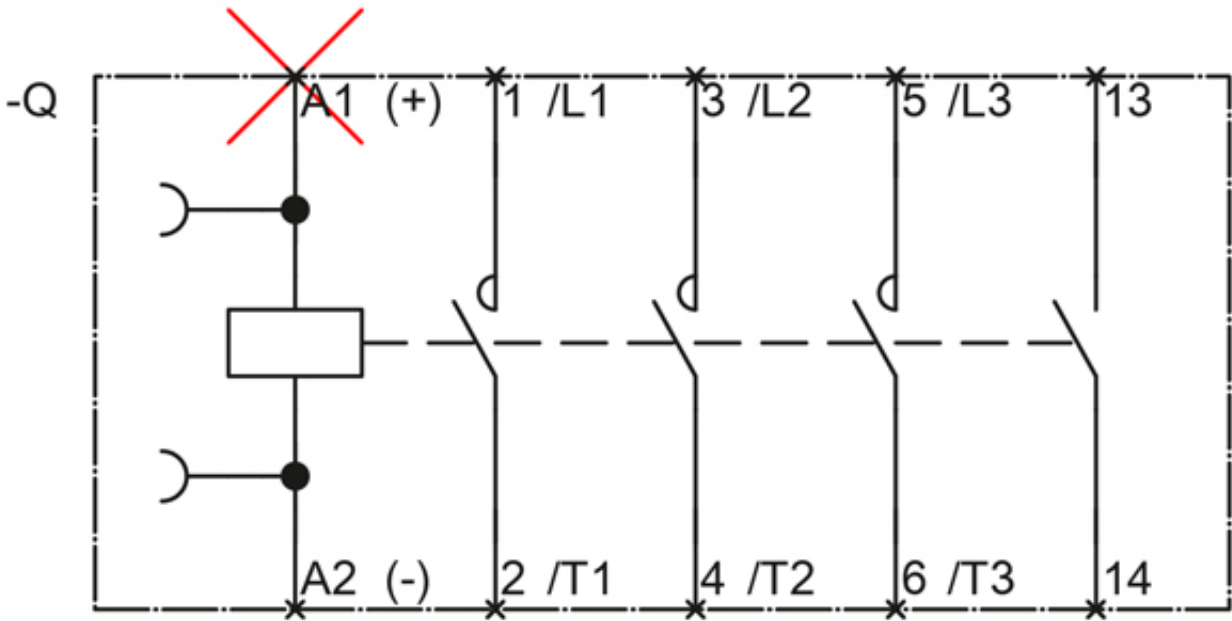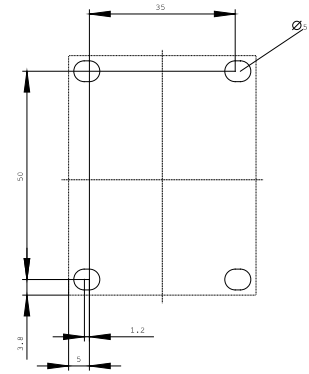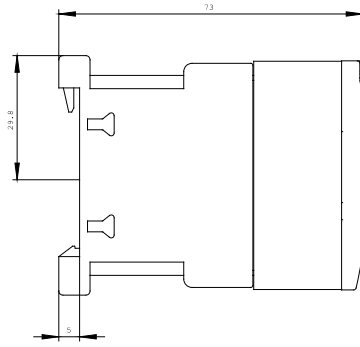

last change:

May 8, 2010