

## Specification Status: Released

### Electrical Rating

**Voltage: 72V MAX**  
**Current: 40A MAX**

### Insulating Material:


Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements

### Lead Material:

24 AWG Tin Plated Copper Clad Steel

### Marking:

Manufacturer's Mark  
and Voltage  
 Part Identification  
 Lot Identification  
(can be on back)

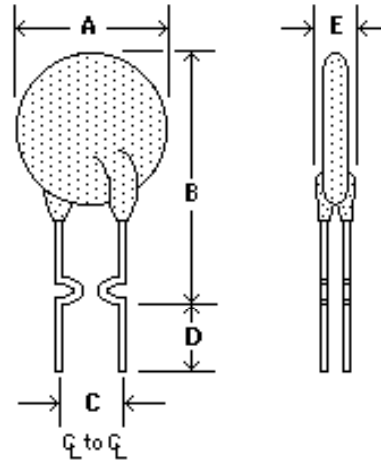

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	11.7	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.46)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C				
0.20	0.20	0.40	MIN	MAX	SECONDS AT 20°C, 1.0A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
			1.83	2.75	2.2	4.40	0.41

### Agency Recognitions:

UL, CSA, TUV

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).  
PS300

### Reference Documents:

This specification takes precedence over documents referenced herein.

### Precedence:

Reference documents shall be the issue in effect on the date of invitation for bid.

### Effectivity:

### CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

### Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

