

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/17/07'	~	


NOTES:

- SPECIFICATION
 - CURRENT RATING: 5A Max.
 - DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
 - CONTACT RESISTANCE: 100mΩ Max.
 - INSULATION RESISTANCE: 1000MΩ(DC)Min.


2.PRODUCT NUMBER CODE:

DS1110-08 - X X X X

- SHELL SURFACE FINISHED
- P:SPRAY THE PAINT (GRAY)
- CONTACT PLATING
- Y: SILVER
- COLOR OF HOUSING:
- L: BLUE
- No. OF CONTACTS
- 02: 2pin 5: 05pin
- 03: 3pin 7: 07pin
- 04: 4pin

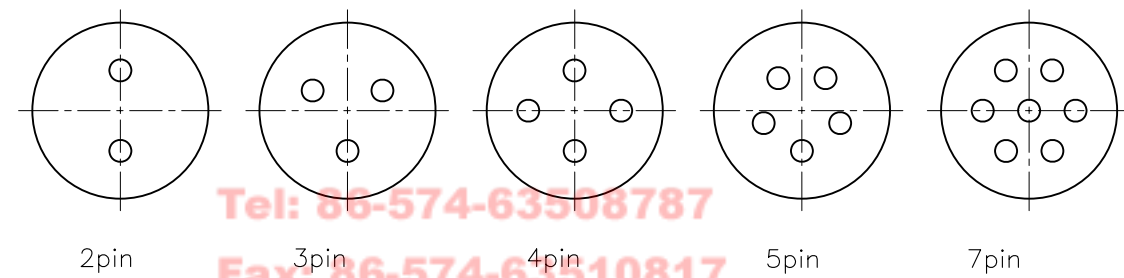

Tel: 86-574-63508787
Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X. ±0.60	.X ±0.38	.X ±5°	.X ±3°	mm	MICRO JACK CONNECTOR
.XX ±0.25		.XX ±2°			SHEET SIZE A4 SERIES DS1110-08 SERIES
DRAWING TYPE	CUSTOMER		Add: West Jiaon Cixi Ningbo China		
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1110-08-XXX		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		