


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

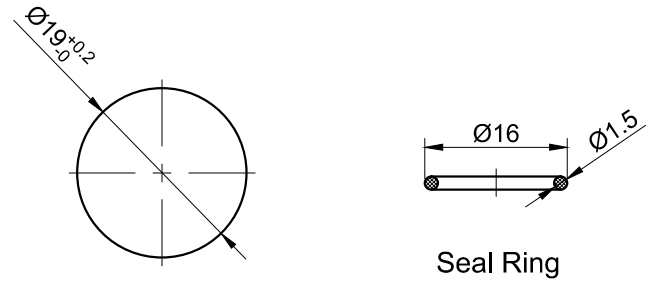

PANEL CUTOUT
MAX.PANEL THICKNESS
10 mm

Part Number: LAS1-AGQ-■/▲

■	Design Code	▲	Voltage
M	Buzzer	12V	DC 12V
JM	Intermittent buzzer	24V	DC 24V
		110V	AC 110V
		220V	AC 220V
Other voltage can be made to order			

SPECIFICATIONS:

- 1.Life: About 40,000 hours.
- 2.Operating Temperature: -25°C~ +55°C.
- 3.Relative air humidity: ≤98%.
- 4.Height above sea level: ≤2000m.
- 5.Vibration strength: 50~60Hz.
- 6.Rated Operating Current: ≤30mA.
- 7.IP Class: IP40.
- 8.Sound intensity: ≥85dB(0.1m)/≥75dB(1m).

MATERIALS:

- 1.Head: Stainless Steel.
- 2.Body: Stainless Steel.
- 3.Base: PA.

BRAND 品牌 **ONPOW** 红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核	CH 2020/04/30		
		FINISH 处理	CHKD 校对	NCH 2020/04/30		
		SCALE 比例	UNIT 单位	DR. 制图	ZPD 2020/04/30	
		1.2 : 1		mm		
DIMENSIONS	TOLERANCE	TITLE 名称				
0.00 TO 18.00mm	±0.43mm	LAS1-AGQ Series Buzzer				
18.01 TO 30.00mm	±0.52mm	DWG NO. 图号				
30.01 TO 50.00mm	±0.62mm	LAS1-AGQ-蜂鸣				
50.01 TO 80.00mm	±0.74mm	FILE NAME 档案名称		SIZE 图纸		
		LAS1-AGQ蜂鸣器.DWG	SHEET 张	1 / 1	REV. 更改	1