


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/06/08'	~	

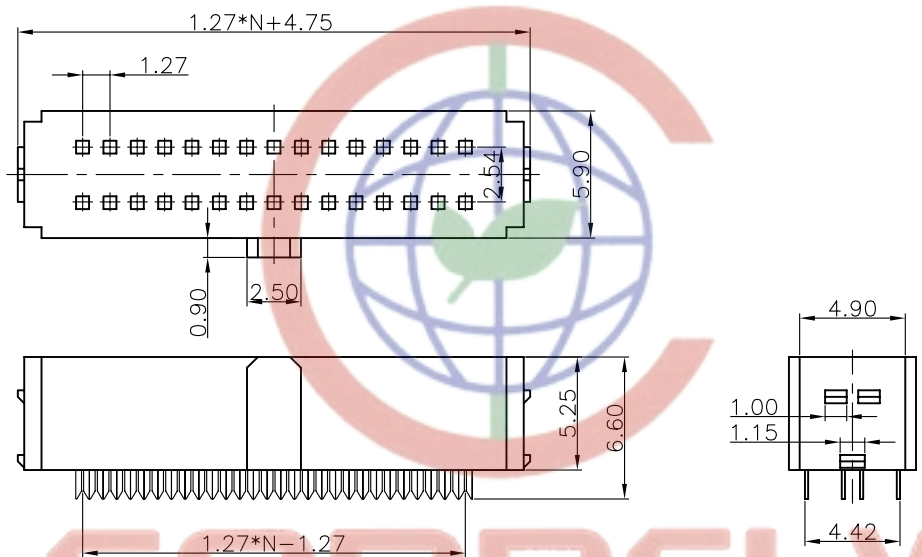

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.
- PART NUMBER: DS1016-01
- PRODUCT NUMBER CODE:
DS1016-01- X X X X



HOUSING COLOR
A:GRAY
B:BLACK
L:BLUE

CONTACT PLATING
2:NICKEL + GOLD FLASH
6:FULL TIN
8:FULL GOLD FLASH

POLARIZATION SUPPORT
A:W/
B:W/O

No. OF CONTACTS
10 20 26 30
34 40 50 60
68 70 80 90
100

Tel:86-574-63508737
Fax:86-574-63510817
E-mail:sale@zhenqin.com.cn
Http://www.connfly.com

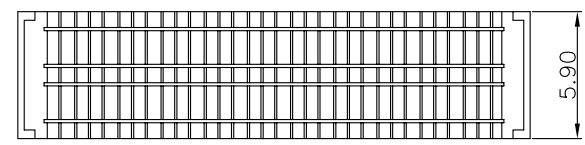

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27*2.54mm
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	SERIES DS1016-01 SERIES			
.XX	±0.25	.XX	±2°	DRAWING NO. C-DS1016-01-XXXX			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
SHEET		1 OF 1					