



1	2	3	4	5	6	7
---	---	---	---	---	---	---

USB AM TYPE MALE

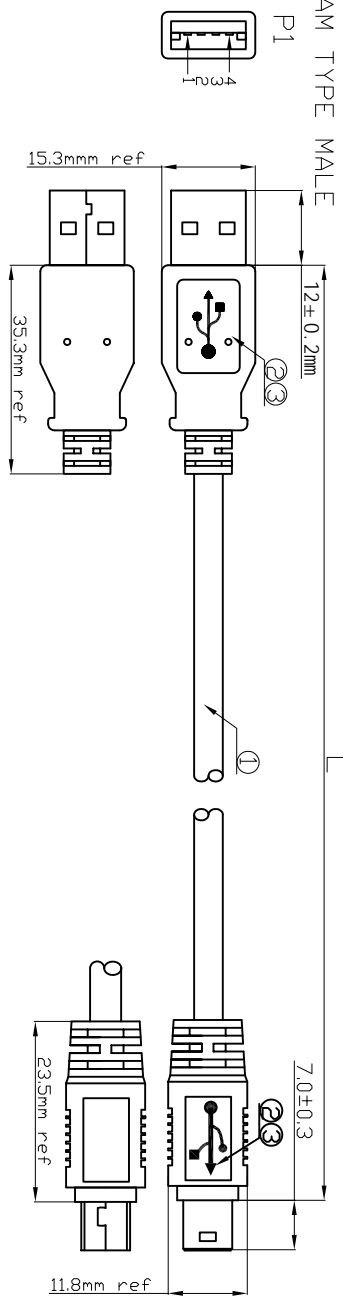

USB BM TYPE MALE



P1

P2

NOTES:

1CABLE: UL 2725 28AWG(7/0.12BC)\*1P+28AWG(7/0.12BC)\*2C  
 +AL/MY BRAIDING(62% COVERAGE ) DD=3.8±0.20mm JACKET: PVC/BLACK  
 CABLE MUST PRINT: EXXXX **AW** AWM STYLE 2725 80°C 30V VV-1



2CONNECTOR:

P1 : USB A/M, SOLDER, WHITE INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL  
 P2 : MINI USB SP B/M, SOLDER, BLACK INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL

3HODD: MOLDED TYPE,PVC 4SP,COLOR:BLACK.

4ELECTRICLE TEST:

- (1)100% OPEN SHORT & MISS WIRE TEST.
- (2)CONDUCTOR RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE:DC 300V 10M? Min

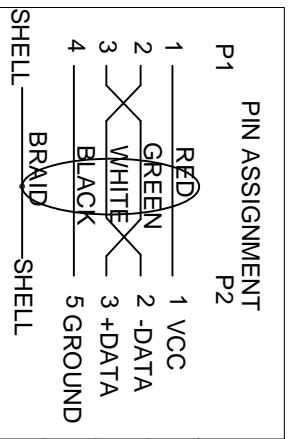

ASSMANN WSW P/N	LENGTH
AK-300108-010-S	1000±30mm
AK-300108-018-S	1800±30mm
AK-300108-030-S	3000±50mm

RoHS compliant

Scale	FREE						
TOLERANCE							
X.	±X						
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°	②	Update the drawing	23.06.2014	Winnie		
X.X°	±X°	①	Drawn	06.07.2009	Rate		
Angle	TOL	Id.	Modification	Date	Name		

Customer-No.	
ASSMANN WSW-No.	AK-300108-xxx-S
Drawing-No.	ASS 3644 CA
Replace	rev02
	Sheet

1	2	3	4	5	6	7
---	---	---	---	---	---	---