


HONEYWELL PART NUMBER
21SX39-T
PRODUCT CODE VDM3900
JG-NUMBER JG-80956 & JG-80956J
MILITARY PART NUMBER 24547-1

REV	DOCUMENT	CHANGED BY	CHECK
12	0038449	VS 28APR08	BLR

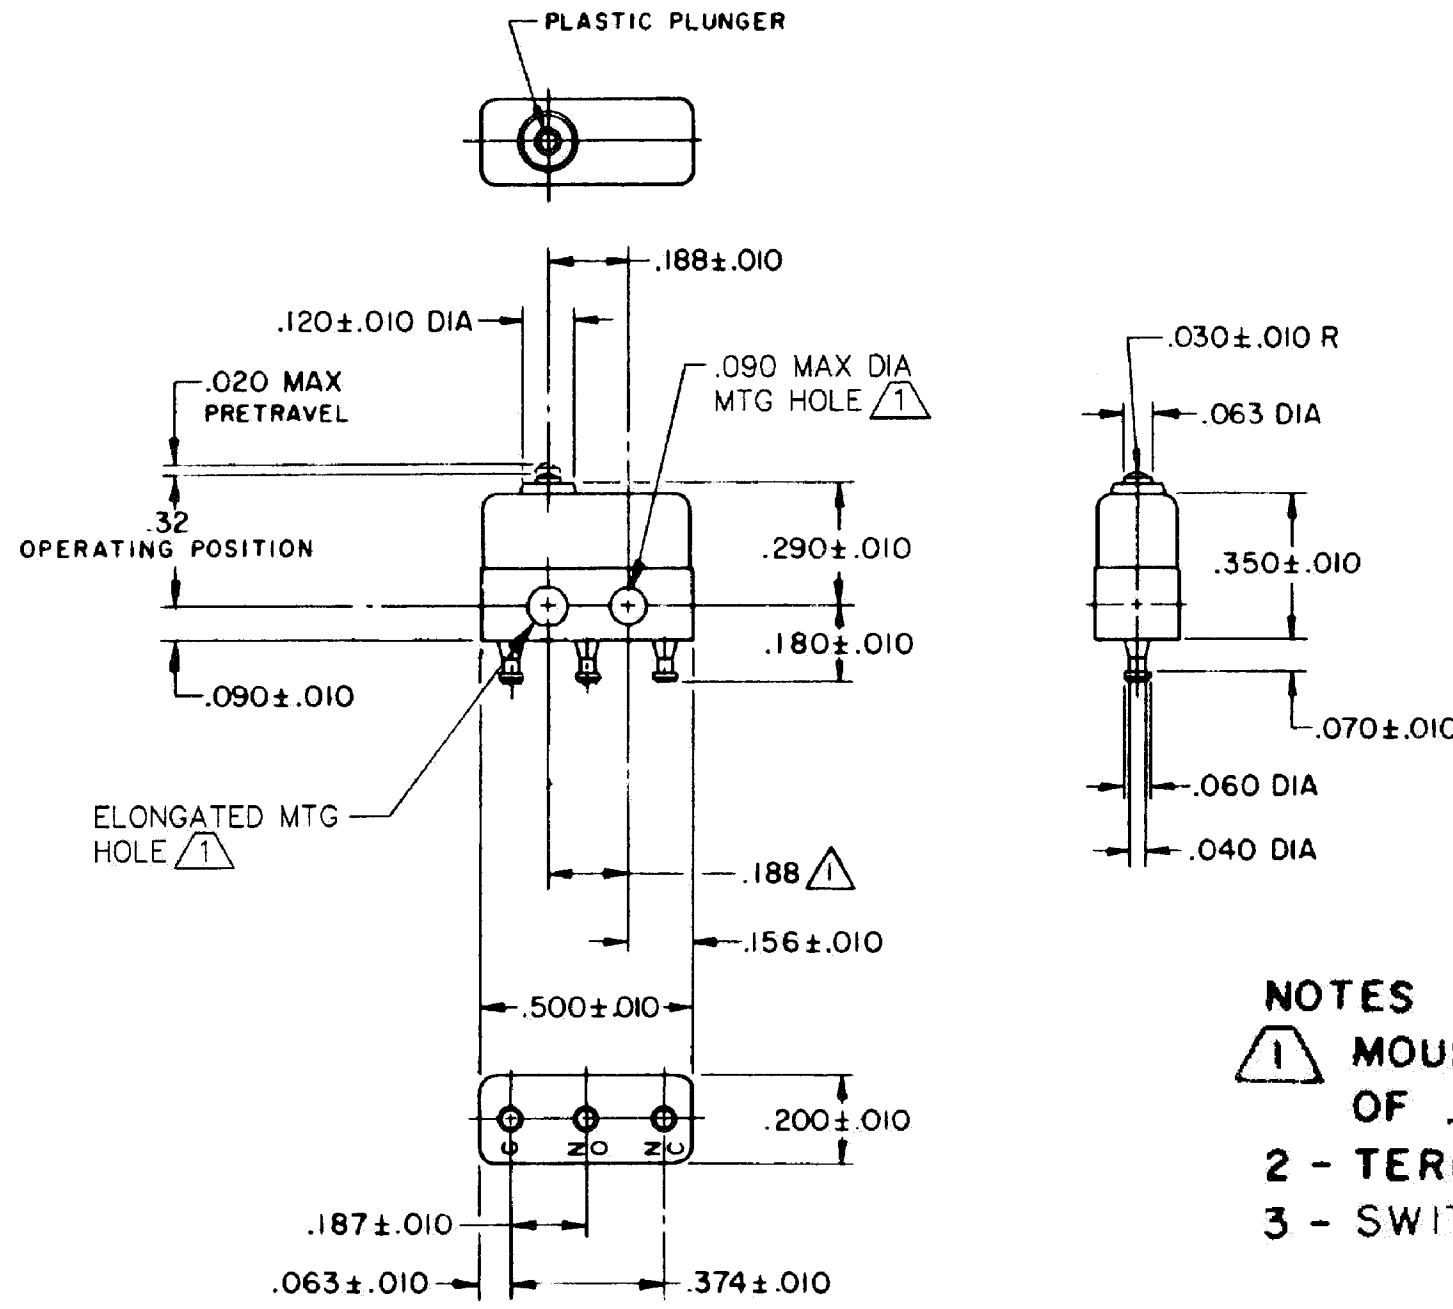

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
  - 2 - TERMINALS ARE PLATED FOR SOLDERING
  - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 185° F

RELEASE NO. SR 12676

REPLACES

**CHARACTERISTICS**

OPERATING FORCE --- 5 OZ MAX

RELEASE FORCE --- 1 OZ MIN

DIFFERENTIAL TRAVEL --- .005 MAX

OVERTRAVEL --- .004 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT SPDT			
28 VOLTS DC RATING		115 VOLTS AC, 60 CPS	
	SEA LEVEL	50,000 FT	SEA LEVEL
INDUCTIVE	4 AMP	2.5 AMP	7 AMP
RESISTIVE	7 AMP	4 AMP	7 AMP
LAMP	2.5 AMP	2.5 AMP	2 AMP

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	
ANGLES		±	

THIRD ANGLE PROJECTION

DRAWN	SPK	20FEB08
CHECK	RJ	20FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		


**Honeywell**

TITLE: SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	21SX39-T	12

APPROVALS

KEMA, CE	7A 250 V - T125 5E4	UL, CSA	7A 250 VAC
----------	---------------------	---------	------------



RASTER

SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1
-------	---	---------------------	--------------