

DC Connector, Plug, 5.5x2.5 mm, 2-pole, straight, with cable



### Description

- pre-assembled cable
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole, straight

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Diameter	5.5 mm / 2.5 mm
Number of Poles	2-pole
Ratings DC	0.5 A / 12 VDC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	Cable
Cord Length	1.8 m
Cable Length	2 x 0.3 mm <sup>2</sup>
Style	straight
Lifetime	5000 Insertions

### Dimensions

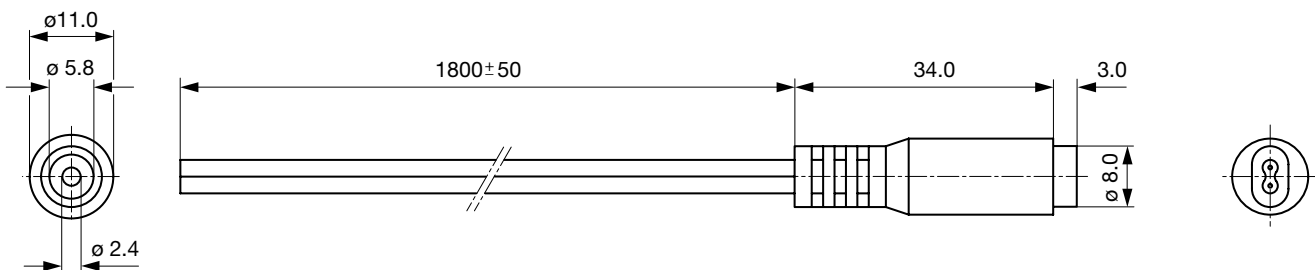

### Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.5	2-pole	Cable	4840.5212

**Packaging unit** 200 Pcs

### Mating Inlets/Plugs

#### Category / Description

[DC Plug/Socket Overview complete](#)



DC Connector, Plug, 5.5x2.5 mm, 2-pole, solder terminal 4840.1210

DC Connector, Plug, 5.5x2.5 mm, 2-pole, straight, with cable 4840.5210

[DC Plug/Socket further types to 4840 DC-Stecker, verschiedene](#)

## Mating Outlets/Connectors



DC Plug/Socket Overview complete

DC Connector, Plug, 5.5x2.5 mm, 2-pole, angled, with cable

4840.5211

DC Plug/Socket further types to 4840 DC-Stecker, verschiedene